


ABBRUCHGREIFER

HDG SERIE

25 MODELLE ABBRUCHGREIFER VON 85 BIS ZU 14.200 KG FÜR
BAGGER VON 0.7 BIS 200 TONNEN

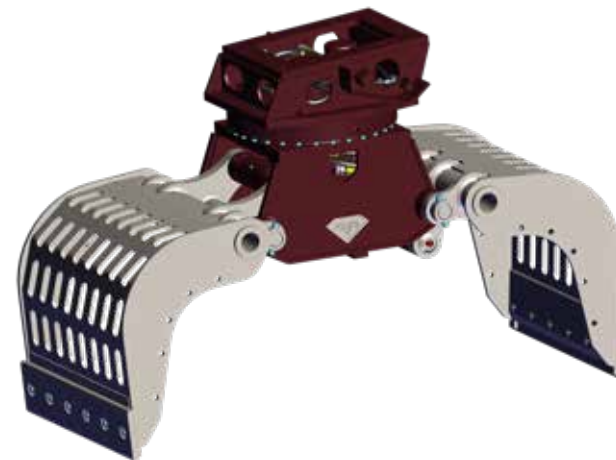

		HDG-8R	HDG-10R	HDG-15R	HDG-25R	HDG-42R	HDG-46R	HDG-52R	HDG-62R	HDG-88R
(1) Baggerklasse	T.	0.7 - 1.2	0.7 - 2.0	1.2 - 3	3 - 5	4 - 6	5 - 9	7 - 11	10 - 15	12 - 18
Gewicht	Kg.	100	120	200	290	400	450	560	680	980
Arbeitsdruck	Bar.	300	300	300	300	300	300	320	350	350
Ölvolumenstrom öffnen/schließen	L/min.	15	20	25	35	40	50	70	90	100
Arbeitsdruck beim rotieren	Bar	210	210	210	210	210	210	210	210	210
Ölvolumenstrom beim rotieren	L/min.	5	5	10	10	12	12	15	15	25
Schalenbreite	mm.	300	350	450	500	600	700	700	600	800
Öffnungsweite	mm.	600	770	750	1160	1400	1500	1550	1800	1800
Bauhöhe	mm.	700	700	700	850	950	1000	1100	1150	1200
Kapazität	Ltr.	30	50	70	100	150	200	200	300	400
Schließkraft	kN.	8	12	18	22	26	28	30	36	45

TRIBAC Baumaschinen

16761 Hennigsdorf
Philipp-Pförr-Straße 9A /
Spandauer Allee
Tel.: 0 33 02 / 49 98 29 - 0
Fax.: 0 33 02 / 49 98 29 - 22

14513 Teltow bei Potsdam
Schenkendorfer Weg 10 /
Stahnsdorfer Straße
Tel.: 0 33 28 / 33 94 - 0
Fax.: 0 33 28 / 33 94 - 222












**15366 Neuenhagen
bei Berlin**
Am Wall 51
Tel.: 0 33 42 / 23 69 - 0
Fax.: 0 33 42 / 23 69 - 99












12557 Berlin
Glienicker Straße 101
Tel.: 0 30 / 64 89 758 - 0
Fax.: 0 30 / 64 89 758 - 22



www.tribac.de · info@tribac.de

(1) Empfohlene Bagger / Anbauteil Kombination

		HDG-110R	HDG-130R	HDG-150R	HDG-180R	HDG-210R	HDG-240R	HDG-280R	HDG-310R
 (1) Baggerklasse	T.	14 - 22	15 - 24	17 - 25	18 - 28	20 - 30	22 - 32	24 - 36	25 - 38
 Gewicht	Kg.	1140	1220	1380	1520	1640	1830	1980	2030
 Arbeitsdruck	Bar.	350	350	350	350	350	350	350	350
 Ölvolumenstrom öffnen/schließen	L/min.	120	120	120	150	160	170	170	170
 Arbeitsdruck beim rotieren	Bar	210	210	210	210	210	210	210	210
 Ölvolumenstrom beim rotieren	L/min.	25	25	25	35	35	35	35	35
 Schalenbreite	mm.	800	900	1000	900	1000	1200	1200	1200
 Öffnungsweite	mm.	1950	1950	1950	2100	2100	2100	2250	2200
 Bauhöhe	mm.	1300	1300	1300	1500	1500	1500	1500	1650
 Kapazität	Ltr.	500	600	700	750	800	850	900	900
 Schließkraft	kN.	50	50	50	62	68	72	80	80

		HDG-340R	HDG-380R	HDG-420R	HDG-480R	HDG-520R	HDG-640R	HDG-820R	HDG-1400R
 (1) Baggerklasse	T.	28 - 42	30 - 45	32 - 52	35 - 54	42 - 64	50 - 85	80 - 140	120 - 240
 Gewicht	Kg.	2280	2840	3060	3420	4360	5420	8120	14200
 Arbeitsdruck	Bar.	350	350	350	350	350	350	350	350
 Ölvolumenstrom öffnen/schließen	L/min.	200	200	200	200	250	300	320	350
 Arbeitsdruck beim rotieren	Bar	210	210	210	210	250	250	250	250
 Ölvolumenstrom beim rotieren	L/min.	25	25	25	35	35	35	35	35
 Schalenbreite	mm.	1200	1200	1360	1500	1500	1500	1600	1800
 Öffnungsweite	mm.	2200	2200	2200	2400	2600	3000	3500	4400
 Bauhöhe	mm.	1700	1700	1750	1800	1900	2000	2300	3000
 Kapazität	Ltr.	950	1000	1100	1300	1500	1600	2000	4600
 Schließkraft	kN.	90	95	100	110	148	155	180	220